

Applications

 Municipal jobs
 Construction

Landscaping

Main features

Designed and built specifically for Bobcat loaders.

Hydraulic side shift capability to trench close to buildings, fences or other objects. Get even closer by removing the auger.

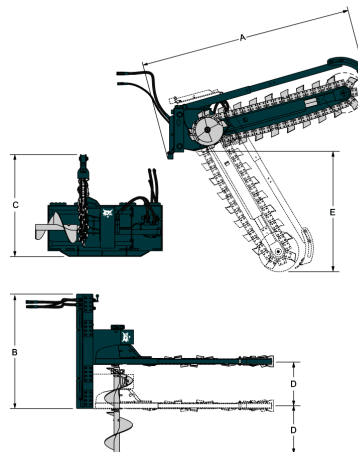
Changing to a trencher attachment is quick and easy with the Bob-Tach™ mounting system.

Compatibility

Description	Item number	Compatible with loader	Compatible with telescopic
Trencher LT112TRN112X2X4*851579		S70-E, MT55	T2250
Trencher LT113TRN113X3X4*851581		S70-E, MT55	
Trencher LT213TRN213X3X4*851583		S100, S130-E, T110-E	T2250
Trencher LT313TRN313X4X6*851585		S130-E, S160-E, S175-E, S185-E, T190-E, S205-E	T2250
Trencher LT405	6906100	T190-E, T320-B, S185-E, S175-E, T190-B, S250-B, S630-E, S650-E, T650-E, S205-E, S770-E, T770-E, A770-E	T2250
Trencher LT414TRN414X5X6*851587		S160-E, S175-E, S185-E, T190-E, S630-E, S650-E, T650-E, S205-E	T2250

Characteristics and Performance

Description	Item number	Digging depth (mm)	Trench width (mm)	Boom length (mm)	Required hydraulic flow (L/min)	Side shift (mm)
Trencher LT112TRN112X2X4*851579		600.0	101.0-203.0	1000.0	34.0-57.0	409.0
Trencher LT113TRN113X3X4*851581		-	-	-	-	-
Trencher LT213TRN213X3X4*851583		900.0	101.0-203.0	1334.0	42.0-68.0	587.0
Trencher LT313TRN313X4X6*851585		1200.0	152.0-305.0	1664.0	57.0-83.0	587.0
Trencher LT405	6906100	1219.0	152.0-305.0	1600.0	98.0-151.0	660.0
Trencher LT414TRN414X5X6*851587		1575.0	152.0-305.0	2011.0	98.0-151.0	554.0

Weights and dimensions


Description	Item number	Operating weight (kg)	Shipping weight (kg)	Overall length (A) (mm)	Overall width (B) (mm)	Overall height (C) (mm)
Trencher LT112TRN112X2X4*851579		279.0	279.0	1542.0	914.0	-
Trencher LT113TRN113X3X4*851581		-	-	-	-	-
Trencher LT213TRN213X3X4*851583		329.0	329.0	1880.0	1422.0	-
Trencher LT313TRN313X4X6*851585		444.0	444.0	2273.0	1422.0	-
Trencher LT405	6906100	689.0	881.0	2820.0	1651.0	-
Trencher LT414TRN414X5X6*851587		556.0	556.0	2642.0	1429.0	-